

# 550 SERIES

## STANDARD FEATURES:

- 22-gauge flat slats with 1-1/2" high-profile
- Steel endlocks
- Enclosed hood
- U.L. approved
- Fusible links
- Bottom weather seal
- 2-Year limited warranty
- Five finish options: white, gray, tan topcoat, galvanized and stainless steel / 22- gauge, # 4 finish

40 year film integrity and a 35 year no-chalk/no-fade limited paint warranty.



**Maximum**  
12' x 10'

Available in sizes up to 12' x 10'. Five finish options available: white, gray, tan topcoats, galvanized and stainless steel.



**Heavy-Duty**  
Application

Ideal for pharmacies, cafeterias, concession areas, ticket counters, nurse/hospital desks, and many more applications.

## Janus International 550 SERIES FIRE RATED COUNTER SHUTTER

is manufactured with U.L. fire ratings and is a cost effective way of protecting property in case of a fire, while increasing building safety for occupants. The **550 Series** is manufactured to the highest standards featuring, space saving designs and user-friendly operation. The fail-safe operating system is activated by fusible links, smoke detectors or can be wired to a central alarm system by one of our release devices. The **550 Series Fire Rated Counter Shutter** is the perfect choice for pharmacies, cafeterias, concession areas, ticket counters, nurse/hospital desks, and many more applications where a fire rated wall exists.



## OPTIONS

- » **Fire Rating:**  
Available in 3/4 hour, 1-1/2 hour, and 3 hour.
- » **Sizes:**  
Up to 12'- 0" wide X 10'- 0" high.
- » **Operation:**  
Push-up, hand crank, and motor operation available on all sizes.
- » **Locking:**  
Thumb turn lock or cylinder locks available.
- » **Weather Seal:**  
U.L. rated jamb brush seal and flame baffle.
- » **Powder Coating:**  
Available on all gauges flat or curved profile. Consult factory for available colors.

## FIRE RATED COUNTER SHUTTER 550


### MODEL 550 (22-GAUGE STEEL), MODEL 550S (STAINLESS 22-GAUGE)

**Activation System** | Activated by the melting of 165° fusible links, smoke detectors, or the building's fire alarm system when installed with one of our release devices.

**Drum/Axle Assembly** | Barrel fabricated from minimum 4-1/2" O.D. pipe, with 1" tension and drive shaft and provided with threaded rings or lugs welded to barrel for curtain assembly. Springs to be oil tempered grease packed helical torsion type.

**Slats** | 1-1/2' flat slat 22-gauge galvanized steel with baked on epoxy primer and super durable polyester topcoat in white, gray, tan or galvanized (powder coat optional) or 22-gauge stainless steel.

**U. L. Labeled** | 45-minute, 90-minute or 2 hour approved Fire Shutter to be installed on approved sheetrock, steel or masonry walls.

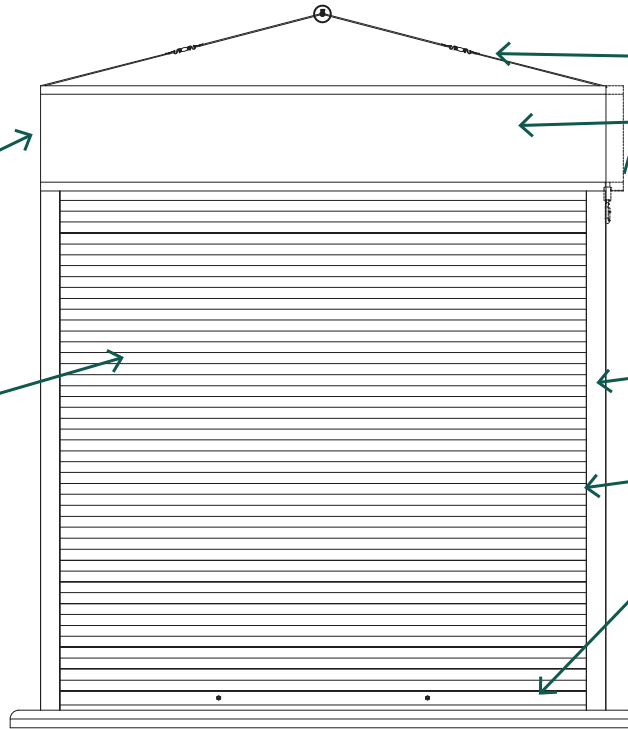

**Fusible Links**

**Hoods** | 22-gauge steel with galvanized steel with baked epoxy primer and baked polyester topcoat on steel curtain or stainless-steel hood with stainless curtain.





**Operation** | Manual push up standard up to 10'-4" wide, wider doors crank operation is standard.

**Guides** | Boxed shaped steel guides for steel doors and curtain stops or stainless steel with stainless steel doors.


**Endlocks** | Steel endlocks each end of alternate slats.

**Bottom Bar** | Steel angle bottom bar standard on steel doors, stainless steel angle is standard with stainless steel doors. Both available with bottom weather seal.

## SPECIFICATION DETAILS

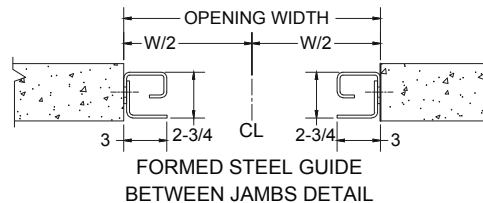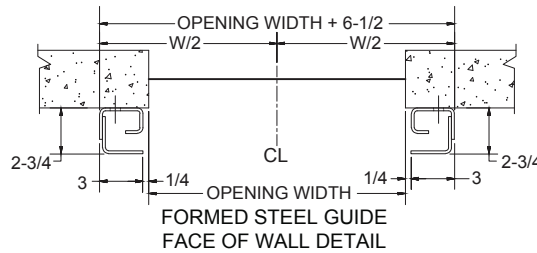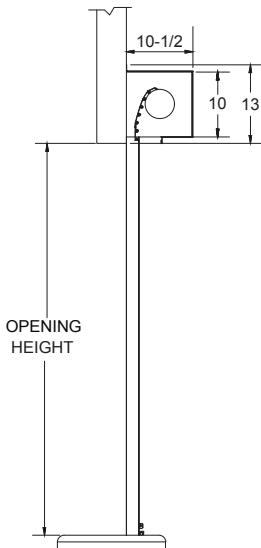

22-GAUGE STEEL FLAT SLAT



22-GAUGE STAINLESS STEEL FLAT SLAT

## STANDARD FEATURES

500 SERIES	Curtain	Color	Guides	Bottom Bar	Hood
Model 552	22 Gauge Galvanized Steel	White, Gray Tan and Galvanized	Steel	Steel	24-ga Steel
Model 552S	Stainless Steel 22-ga	#4 Finish	Stainless Steel	Stainless Steel	Stainless Steel

Janus International reserves the right to change engineering specifications without prior notice. Illustrations shown are for general reference and should be verified for construction purpose.

2024-02

### HEADQUARTERS

Janus International Group  
135 Janus International Blvd.  
Temple, GA 30179

866-562-2580  
marketing@JanusIntl.com  
JanusIntl.com