NOTES:

1) OPERATION TYPE MAY BE PUSH-UP, HAND CHAIN OR ELECTRIC.
2) CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
3) UNLESS OTHERWISE NOTED, DOORS SHALL BE PROVIDED WITH SLIDE LOCKS AT EACH END OF BOTTOM BAR, ENGAGING GUIDES IN THE LOCKED POSITION.
4) ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
5) SERIES 1950HDI IS AN INSULATED SERIES 1950HD.
6) CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAINT OVER GALVANIZED GRADE 80 STEEL.
7) GUIDES, BRACKETS, BOTTOM BAR ANGLE AND HEAD STOPS ARE ZINC COATED.
8) VISION PANELS ARE AVAILABLE.

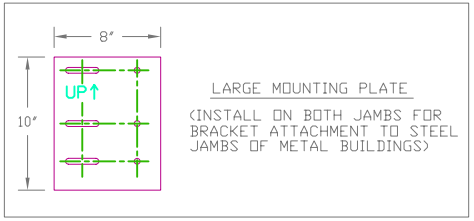

LARGE MOUNTING PLATE

(INSTALL ON BOTH JAMBS FOR BRACKET ATTACHMENT TO STEEL JAMBS OF METAL BUILDINGS)



STEEL JAMBS
(USING 1/4-14 X 1″ TEKS)



WOOD JAMBS
(USING 1/4-10 X 1″ LAG)



CONCRETE/MASONRY JAMBS
(USING 1/4″ X 1-3/4″ POWERS WEDGE-BOLT)

BRACKET ATTACHMENT

CONCRETE/MASONRY: POWERS WEDGE-BOLT, 3/8 X 1-3/4″ LONG
WOOD: LAG SCREW, 3/8-7 X 3″ LONG
STEEL: HEX BOLT, GR.5, 3/8-16 X 1-1/4″ LONG

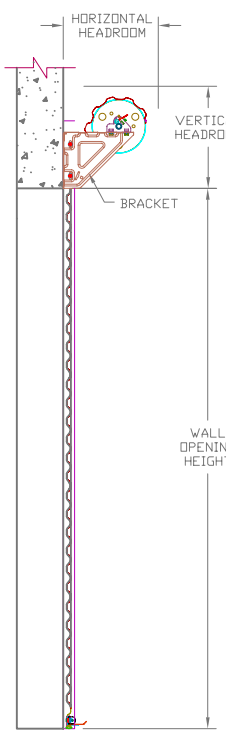

END VIEW

(*) FOR PUSH-UP OPERATION: 5-5/8″
FOR HAND CHAIN OPERATION: 7″
FOR ELECTRIC OPERATION: 8-1/8″
FOR OUTSIDE OF CHAIN DRIVE: 8-1/2″
NOTE: RIGHT SIDE DRIVE SHOWN

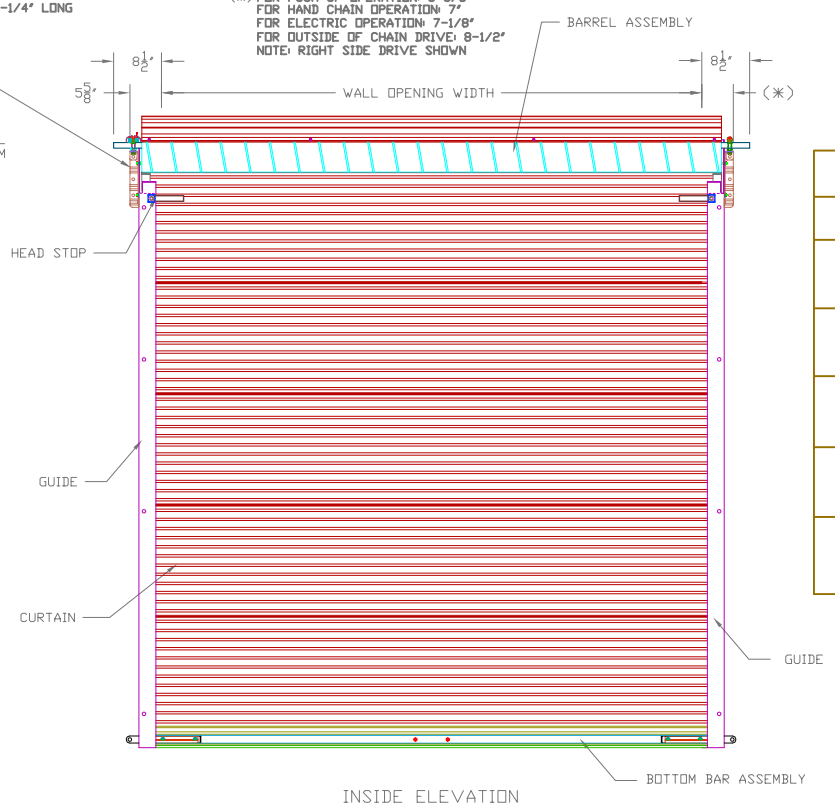

INSIDE ELEVATION

HEADROOM REQUIRED

OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
THRU 8′-0″	16″	18″
OVER 8′-0″ THRU 10′-0″	18″	20″
OVER 10′-0″ THRU 14′-0″	19″	21″
OVER 14′-0″ THRU 16′-0″	20″	22″
OVER 16′-0″ THRU 18′-0″	21″	23″
OVER 18′-0″ THRU 20′-0″	22″	24″

12 GA GUIDE MOUNTING DETAIL



DETAIL A

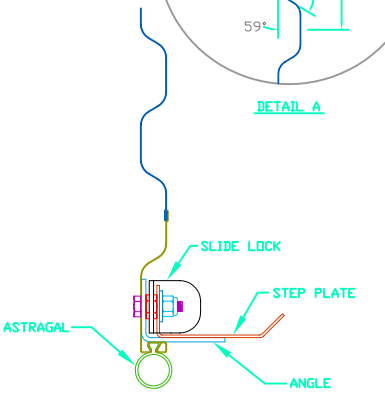

BOTTOM BAR ASSEMBLY



CURTAIN PANEL
26 GA CURTAIN DETAIL

3-16-06

FACTORY ORDER NUMBER	DOOR SERIES		QTY	OPENING SIZE		JAMB TYPE			OUTSIDE CURTAIN COLOR	OPERATION			OPERATION HAND	WEATHERSTRIP			ADDED OPTIONS
	1950 HD	1950 HDI		WIDTH	HEIGHT	STEEL	CONC./ MAS.	WOOD		PUSH UP	REDUCED CHAIN	ELECTRIC		TOP	HEADER	SIDE	

COMMERCIAL DOOR SERIES: 1950HD/1950HDI

CUSTOMER NUMBER:	DATE:
CUSTOMER NAME:	CONTACT:
PROJECT NAME:	
PROJECT LOCATION:	
PLANT:	SALESPERSON:
DRAWN BY:	DATE:
DRAWING NUMBER:	SHT: OF:

JANUS INTERNATIONAL CORPORATION
134 EAST LUKE ROAD
TEMPLE, GA 30179-4435
770-562-2850 FAX: 770-562-2264