



NOTES:

- 1) OPERATION TYPE MAY BE PUSH-UP, HAND CHAIN OR ELECTRIC.
- 2) CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
- 3) UNLESS OTHERWISE NOTED, DOORS SHALL BE PROVIDED WITH SLIDE LOCKS AT EACH END OF BOTTOM BAR, ENGAGING GUIDES IN THE LOCKED POSITION.
- 4) ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
- 5) SERIES 1950I IS AN INSULATED SERIES 1950.
- 6) CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAIN OVER GALVANIZED GRADE 80 STEEL.
- 7) GUIDES, BRACKETS, BOTTOM BAR ANGLE AND HEAD STOPS ARE ZINC COATED.
- 8) VISION PANELS ARE AVAILABLE.


BRACKET ATTACHMENT

CONCRETE/MASONRY: POWERS WEDGE-BOLT, 3/8 X 1-3/4' LONG
 WOOD: LAG SCREW, 3/8-7 X 3" LONG
 STEEL: HEX BOLT, GR.5, 3/8-16 X 1-1/4' LONG

(*) FOR PUSH-UP OPERATION 4-1/8"
 FOR HAND CHAIN OPERATION 5-1/2"
 FOR ELECTRIC OPERATION 5-5/8"
 FOR OUTSIDE OF CHAIN DRIVE/ 7"
 NOTE: RIGHT SIDE DRIVE SHOWN

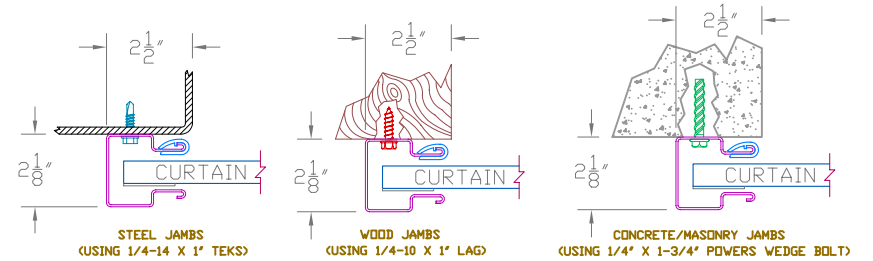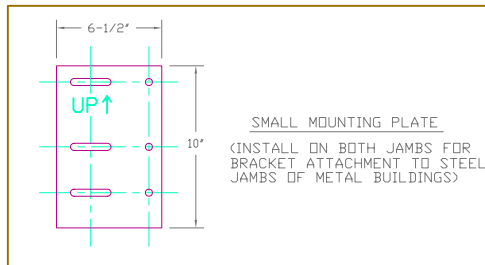


16 GA GUIDE MOUNTING DETAIL

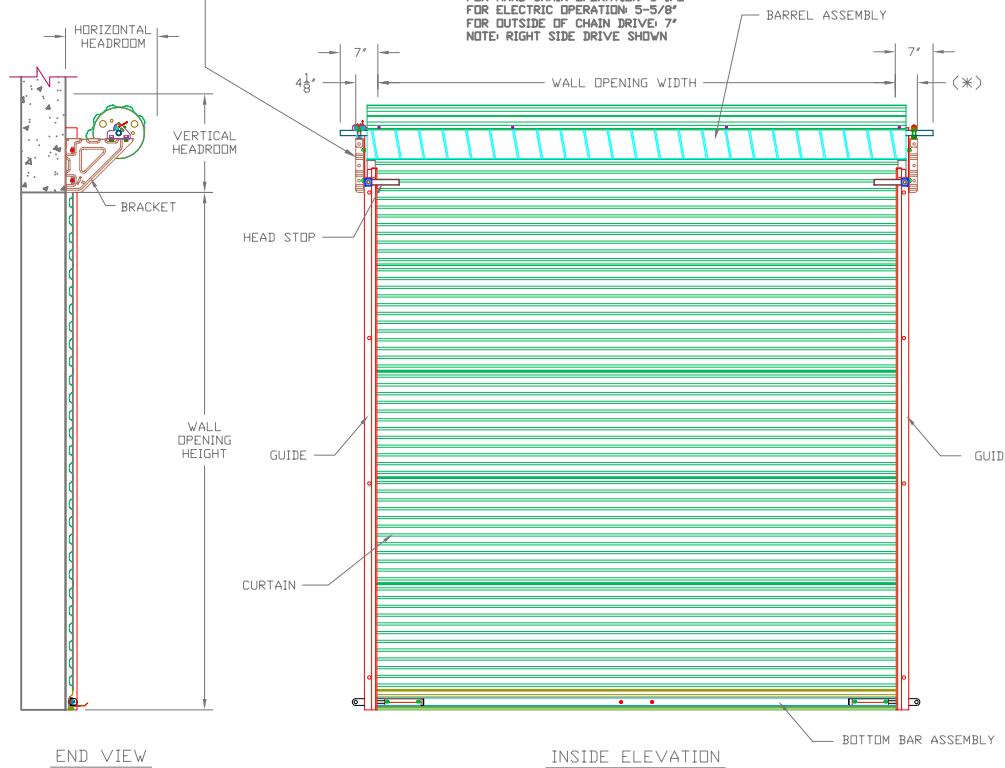

HEADROOM REQUIRED

OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
THRU 8'-0"	16'	18'
OVER 8'-0" THRU 10'-0"	18'	20'
OVER 10'-0" THRU 14'-0"	19'	21'
OVER 14'-0" THRU 16'-0"	20'	22'
OVER 16'-0" THRU 18'-0"	21'	23'
OVER 18'-0" THRU 20'-0"	22'	24'

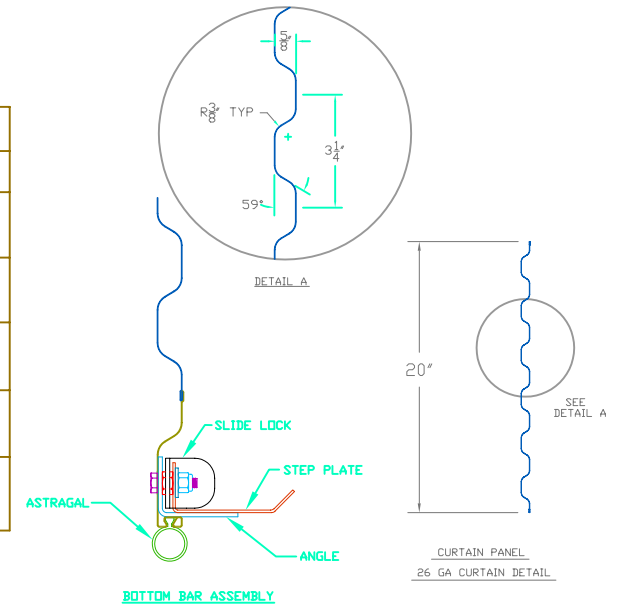

COMMERCIAL DOOR SERIES: 1950/1950I

CUSTOMER NUMBER:		DATE:	
CUSTOMER NAME:		CONTACT:	
PROJECT NAME:			
PROJECT LOCATION:		SALESPERSON:	
PLANT:		DRAWN BY:	
DRAWING NUMBER:		DATE:	JANUS INTERNATIONAL CORPORATION
		SHT:	134 EAST LUKE ROAD
		OF:	TEMPLE, GA 30179-4435
770-562-2850 FAX: 770-562-2264			

FACTORY ORDER NUMBER	DOOR SERIES		QTY	OPENING SIZE		JAMB TYPE			OUTSIDE CURTAIN COLOR	OPERATION			WEATHERSTRIP			ADDED OPTIONS	
	1950	1950I		WIDTH	HEIGHT	STEEL	CONC./MAS.	WOOD		PUSH UP	REDUCED CHAIN	ELECTRIC	OPERATION HAND	TOP	HEADER		SIDE

3-15-06