NOTES:

- 1. OPERATION TYPE MAY BE PUSH-UP, HAND CHAIN OR ELECTRIC.
- 2. FOR CRITICAL FITS DUE TO REDUCED AVAILABLE HEADROOM OR SIDEROOM CLEARANCES, CONSULT FACTORY.
- 3. CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
- 4. UNLESS OTHERWISE NOTED, DOORS SHALL BE PROVIDED WITH SLIDE LOCKS AT EACH END OF BOTTOM BAR, ENGAGING GUIDES IN THE LOCKED POSITION.
- 5. ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
- 6. SERIES 3400I IS AN INSULATED SERIES 3400.
- 7. CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAINT OVER GALVANIZED GRADE 80 STEEL.
- 8. GUIDES, BRACKETS, BOTTOM BAR ANGLE AND HEAD STOPS ARE ZINC COATED.
- 9. MAXIMUM OPENING SIZE: 12'-0" X 18'-0"

DOOR SERIES

3400 34001


FACTORY

ORDER

OPENING SIZE

WIDTH | HEIGHT

10. JANUS MODEL 3400 IS A MIAMI DADE COUNTY APPROVED WINDLOAD PRODUCT. PRODUCT EVALUATIONS AND STAMPED DRAWINGS ARE ACCESIBLE VIA. $\underline{www.miamidade.gov}.$





OPERATION


HAND

TOP | HEADER | SIDE

ELECTRIC








CONCRETE/FILLED BLOCK JAMBS USING 3/8" X 4" POWERS WEDGE BOLT

12 GA GUIDE MOUNTING DETAIL

HEADROOM REQUIRED

	OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
	THRU 8'-0"	20"	20"
	OVER 8'-0" THRU 10'-0"	21"	21"
	OVER 10'-0" THRU 14'-0"	21 ½"	21"
	OVER 14'-0" THRU 16'-0"	22"	21"
	OVER 16'-0" THRU 18'-0"	22"	22"
	OVER 18'-0" THRU 20'-0"	22"	22"

ADDED OPTIONS

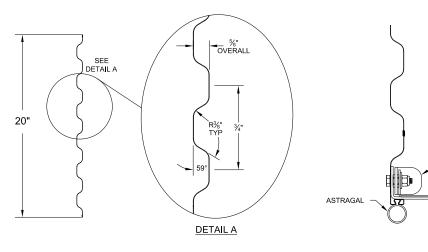

BOTTOM BAR ASSEMBLY

TEMPLE, GA 30179-4435 770-562-2850 FAX: 770-562-2264

- SLIDE LOCK


ANGI F

CUSTOMER NUMBER:

24 GA CURTAIN PANEL DETAIL

COMMERCIAL DOOR SERIES: 3400/34001

CUSTOMER NAME:			CONTACT:	
PROJECT NAME:				
PROJECT LOCATION:				
PLANT:			SALESPERSON:	
DRAWN BY:	DATE:		JANUS INTERNATIONAL GROUP, LLC. 135 JANUS INTERNATIONAL BLVD.	
DRAWING NUMBER:	SHT:	OF:		

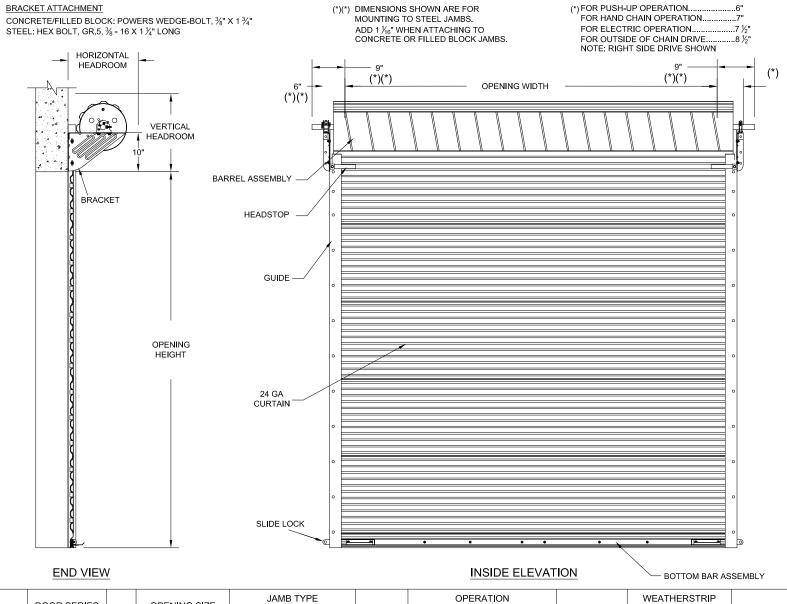

OUTSIDE

COLOR

CONC./

MAS

WOOD

STEEL

CURTAIN PUSH REDUCED

CHAIN