


EZ CLOSURE

Storefront Security is EZ



EZ VENT

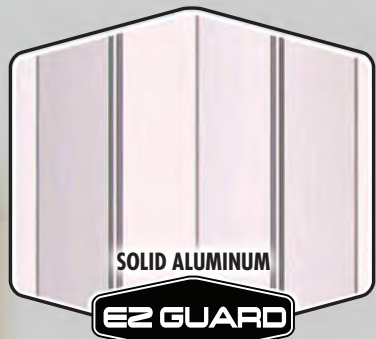

SOLID ALUMINUM

EZ GUARD



OPEN-AIR

EZ GILLE




PERFORATED ALUMINUM

EZ VENT

The **EZ CLOSURE** is labeled with instructions and comes with an **EZ** to follow installation guide.

The **EZ CLOSURE** is pre-installed in its own storage pocket including pocket door!

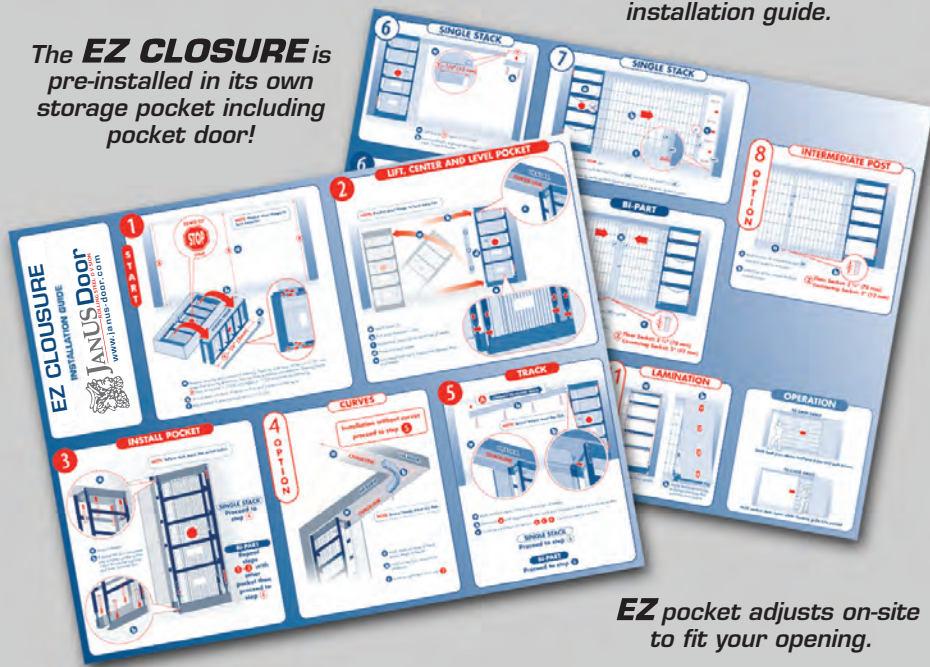

Installs within footprint of six inch stud wall - no additional pocket space required!

So simple to install, anyone can do it in an hour!

Two year Limited Warranty!


EZ pocket adjusts on-site to fit your opening.



JANUS Door
ROLLING STEEL DIVISION
www.janus-door.com

EZ CLOSURE

STANDARD FEATURES

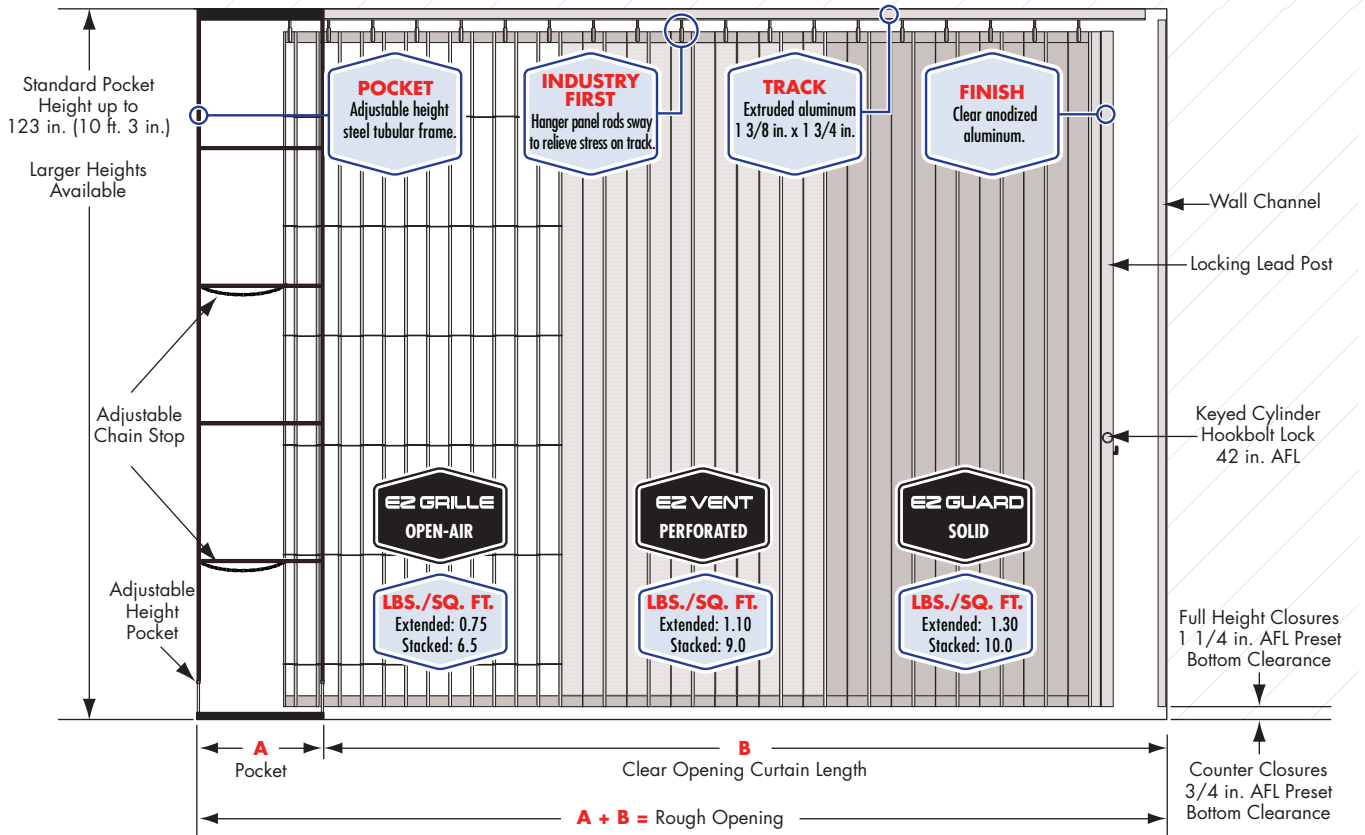

STANDARD STRAIGHT LAYOUT POCKET DIMENSIONS


Rough Opening Width	
A Pocket	B Clear Opening Curtain Length
11 in.	up to 60 in. (5 ft. 0 in.)
15 1/2 in.	up to 102 (8 ft. 6 in.)
20 in.	up to 120 in. (10 ft. 0 in.)
25 in.	up to 162 in. (13 ft. 6 in.)
31 in.	up to 222 in. (18 ft. 6 in.)
36 in.	up to 240 in. (20 ft. 0 in.)
42 in.	up to 294 in. (24 ft. 6 in.)
48 in.	up to 354 in. (29 ft. 6 in.)

Consult factory for layouts with curves.
Larger widths accommodated with custom pockets.

OPTIONAL FEATURES

- Interior thumb turn in lieu of keyed cylinder. Protection panels required on EZ Grille.
- Top and bottom locking lead post.
- Bi-parting closure (dual pockets).
- Factory supplied laminate pocket covering.
- Standard curves and custom radius curves available.

14 in./10-in. Radius



10 in. Radius




10 in. Radius





10 in. Radius



POCKET DETAIL IN 6 INCH STUD WALL

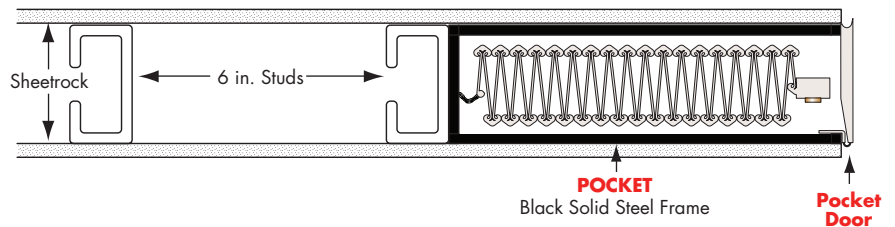

TYPICAL LAYOUTS

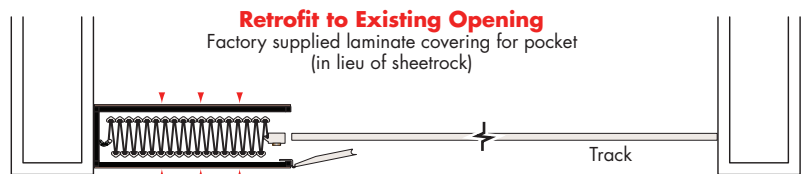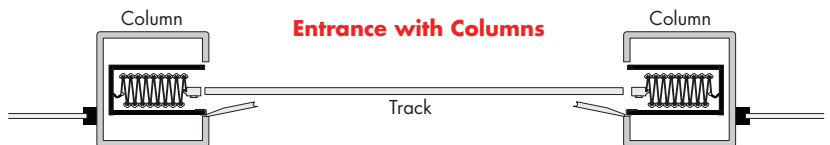

JANUS Door
ROLLING STEEL DIVISION
www.janus-door.com