



400 ROLLING SERVICE DOOR

rolling steel 400



Maximum
16' - 40' Wide*



Flat, Curved,
or Perforated



Quality
Guaranteed



STANDARD FEATURES

- Enclosed hood
- Reduction gear chain hoist
- 3-piece structural steel guides
- Double angle bottom bar with astragal
- 2-year limited warranty
- Guides, bottom bars, and headplates are Envirocron powder coated black at the factory

OPTIONS

Finishes: white topcoat, gray topcoat, tan topcoat, galvanized, stainless steel, aluminum, and custom powder coat

Durable construction: engineered for strength and long-term performance

3" slats: available in 24-, 22-, 20-, or 18-gauge steel; flat, curved, or perforated

Vision panels: 5" x 3/4" cut out, 3" apart, covered with clear Lexan (Flat Slat Only)

Wide size range: up to 40' wide x 30' high; varies by model

Certified options: Windload and Miami-Dade approved for high-wind regions

Versatile use: ideal for industrial and commercial applications

Scan below to see additional features and options.

The **Janus International 400 Series Rolling Service Door** delivers strength, versatility, and lasting performance. Available with 3" slats in multiple gauges and profiles, it fits openings up to 40' wide or 30' high and offers Windload and Miami-Dade options for high-wind areas—making it ideal for industrial and commercial use.

Scan for
more information,
technical specs, and
drawings of this door:



**Contact JANUS for size and options, some limitations may apply.*



Scan to see this door:



400 ROLLING SERVICE DOOR



SLAT PROFILE: Manufactured from commercial-grade galvanized steel and coated with super durable polyester paint backed by a 40-year film integrity and 25-year no-fade paint warranty. Injected polyurethane foam, effective insulating value to be R=7.2.



MIAMI DADE/WINDLOAD: Available in FBC- and TDI-certified windload options, including Miami-Dade County impact certification (20' x 30' Max Size, +60/-65 PSF).




ENVIROCRON™ XMR POWDER COAT : Ultradurable polyester powder coat, with excellent chemical resistance, outdoor weathering, and scratch resistance.



GUIDES: Angles to be 3/16" minimum thickness structural steel with removable head stops and 30" service cut-out. Guide depth to provide slat penetration adequate to satisfy specified windloading.



WEATHERSEAL-OPTIONAL: Optional vinyl-weatherseal, brush seal with retainer, or 8" wide PVC rubber riveted to the inside of the hood.

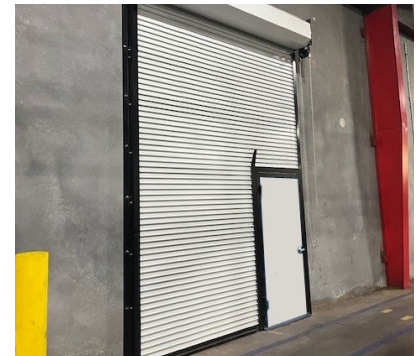

PASS DOOR-OPTIONAL: Metal pedestrian door integrated into the curtain, with the ability to swing frame open for clear opening.

MODEL	SLAT PROFILE	SLAT MATERIAL	SLAT SIZES	MAX SIZE	COLORS/FINISHES	GUIDE
424	Flat-265/ Curved-288	24-ga Cold-Rolled Galvanized Steel	Flat-2-5/8" x 5/8" Curved-2-5/8" x 7/8"	24' x 24'	White/Gray/Tan/ Galvanized/Powder Coat	Min. 3/16" Structural Steel
422	Flat-265/ Curved-288	22-ga Cold-Rolled Galvanized Steel	Flat-2-5/8" x 5/8" Curved-2-5/8" x 7/8"	26' x 26'	White/Gray/Tan/ Galvanized/Powder Coat	Min. 3/16" Structural Steel
420	Flat-265/ Curved-288	20-ga Cold-Rolled Galvanized Steel	Flat-2-5/8" x 5/8" Curved-2-5/8" x 7/8"	26' x 26'	White/Gray/Tan/ Galvanized/Powder Coat	Min. 3/16" Structural Steel
418	Flat-265	18-ga Cold-Rolled Galvanized Steel	Flat 2-5/8" x 5/8"	30' x 30' or 40' x 20'	White/Gray/Tan/ Powder Coat	Min. 3/16" Structural Steel
416A	Flat-265	Aluminum .050"	Flat 2-5/8" x 5/8"	16' x 16'	Aluminum or Powder Coat Aluminum	Min. 3/16" Structural Steel
422S/420S	Flat-265	22-ga & 20-ga Stainless Steel	Flat 2-5/8" x 5/8"	26' x 26'	Stainless Steel #4	Min. 3/16" Structural Steel

Exclusively Distributed by:

JANUSINTL.COM

HEADQUARTERS:

Janus International Group
135 Janus International Blvd.
Temple, GA 30179
866-562-2580

marketing@janusintl.com

**PLEASE VISIT OUR WEBSITE
FOR ADDITIONAL INFORMATION:**

- Color Chart
- Installation
- Technical Drawings
- Warranty