



400HP ROLLING SERVICE DOOR

rolling steel 400HP



High
Performance



Maximum
14' W x 20' H



Up to 3x Faster
Operation



Quality
Guaranteed

STANDARD FEATURES

- 3-piece steel guides with UHMW strip
- UL325 NEMA photo eye sensors
- UL325 3'/6' NEMA light curtain
- Springless barrel, universal left/right handing
- Soft-start/stop DC motor
- Guides, bottom bars, and headplates are Envirocron powder coated black at the factory
- Speed up to 24" open / 12" close
- 400k cycles, 2-year warranty

OPTIONS

Vision panels: 5" x 3/4" cutouts with clear Lexan (flat slat only)

High-cycle option: up to 600,000 cycles or 3 years

Traffic light kit: 3' IP68 LED

QuickPak crating: reduces install time, cost, and damage


Brush seal: header and jamb seal with aluminum retainer

Scan below to see additional features, options, and accessories.

The **Janus International 400HP Series High Performance Door** sets the standard for rolling steel systems—built for durability, security, and smooth operation up to 24" per second. A fraction of the cost of high-speed doors, it delivers up to 3x faster performance, 16x the cycle life, and unmatched reliability for maximum protection and efficiency in any industrial or commercial application.



CONTROL BOX

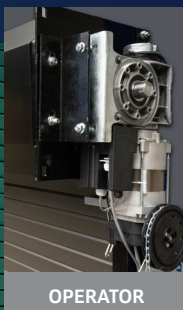

OPERATOR

Scan for
more information,
technical specs, and
drawings of this door:




**Contact JANUS for size and options, some limitations may apply.*



Scan to see this door:




400HP ROLLING SERVICE DOOR

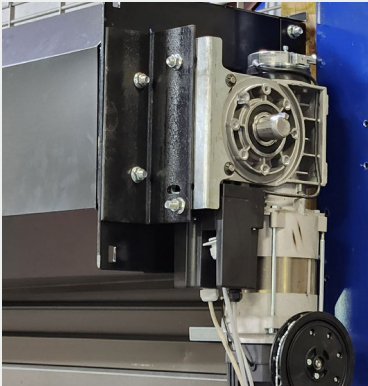

OPERATOR: 400HP Series Doors feature the SecureDrive+ direct drive operator designed specifically for applications requiring high performance. Less wear and tear on the door and operator results in increased operational life.



CONTROL BOX: Plug and Play NEMA 4X wall mounted control panel with variable frequency drive.

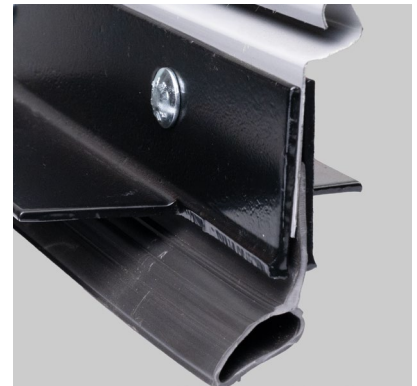


BOTTOM BAR: Curtain bottoms are reinforced with a bottom bar consisting of two structural steel angles with PVC bulb astragal for maximum durability.



CURTAIN: The 400HP Series curtains are assembled with durable slats from galvanized grade 50 steel with nylon endlocks.



UHMW STRIP: High cycle and self-lubricating UHMW applied to interior of guides reduces friction and wear for high cycle applications.

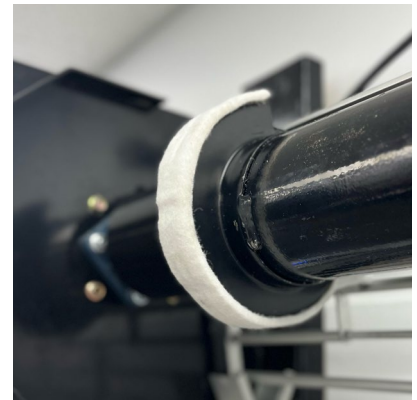

Barrel with rings: Springless Barrel with rings increase the curtain wrap diameter, allowing for smooth coiling and uncoiling of the door, while reducing maintenance costs.

MODEL	SLAT PROFILE	SLAT MATERIAL	SLAT SIZES	MAX SIZE	COLORS/FINISHES	GUIDE	SPEEDS
422HP	Flat	22-ga Cold-Roll Galvanized Steel	2 5/8" x 5/8"	14' x 20'	White, Gray, Tan, Galvanized, PowderCoat	Min. 3/16" Structural Steel	24"/Sec Open 12"/Sec Close
422SHP	Flat	22-ga Stainless Steel #4 Finish	2 5/8" x 5/8"	14' x 20'	Stainless Steel #4 Finish	Min. 3/16" Structural Steel	24"/Sec Open 12"/Sec Close

Exclusively Distributed by:

JANUSINTL.COM

HEADQUARTERS:

Janus International Group
135 Janus International Blvd.
Temple, GA 30179
866-562-2580

marketing@janusintl.com

PLEASE VISIT OUR WEBSITE FOR ADDITIONAL INFORMATION:

- Color Chart
- Installation
- Technical Drawings
- Warranty