



600 ROLLING SERVICE DOOR

rolling steel 600



From 40' x 16'
to 28' x 26'



Insulated



Quality
Guaranteed



STANDARD FEATURES

- Enclosed hood
- Reduction gear chain hoist
- 3-piece structural steel guides
- Double angle bottom bar with weather seal
- 2-year limited warranty
- Guides, bottom bars, and headplates are Envirocron powder coated black at the factory

OPTIONS

Electric Operation: Motorized operation at the push of a button (bracket available on request)

Miami-Dade Certified: Impact rated 80 ft/sec & +60/-65 PSF

Slide Bolt Locks: Dual steel locks for padlocks (standard on manual/push-up doors)

Vision Panels: 5" x 3/4" cutouts spaced ~3" apart with clear Lexan

Windload: Optional up to ± 50 PSF (varies by size/model)

High Cycle Springs: Available in 50,000 or 100,000 cycles

Scan below to see additional features and options.

The **Janus International 600 Series Insulated Rolling Service Door** delivers durability, thermal efficiency, and high performance. Its 24-18 gauge slats with a 24-gauge back encase a 5/8-inch polyurethane core (R-value 7.2). Sizes range from 40' x 16' to 28' x 26' with optional Windload and Miami-Dade certifications, making it ideal for industrial, commercial, and climate-controlled applications.

Scan for
more information,
technical specs, and
drawings of this door:



*Contact JANUS for size and options, some limitations may apply.



Scan to see this door:



600 ROLLING SERVICE DOOR



SLAT PROFILE: Manufactured from commercial-grade galvanized steel and coated with super durable polyester paint backed by a 40-year film integrity and 25-year no-fade paint warranty. Injected polyurethane foam, effective insulating value to be R=7.2.



ENVIROCRON™ XMR POWDER COAT : Ultradurable polyester powder coat, with excellent chemical resistance, outdoor weathering, and scratch resistance.




GUIDES: Angles to be 3/16" minimum thickness structural steel with removable head stops and 30" service cut-out. Guide depth to provide slat penetration adequate to satisfy specified windloading.



MIAMI DADE/WINDLOAD: Available in FBC- and TDI-certified windload options, including Miami-Dade County impact certification (20' x 30' Max Size, +60/-65 PSF).



STC RATING: ASTA 600 Series carries an STC rating of 24. Includes clip-on vinyl guide seal and 3" brush seal for header.

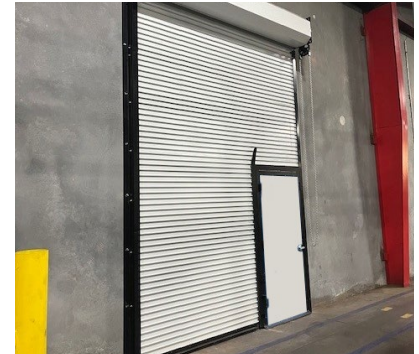

PASS DOOR-OPTIONAL: Metal pedestrian door integrated into the curtain, with the ability to swing frame open for clear opening.

MODEL	SLAT PROFILE	SLAT MATERIAL	SLAT SIZES	MAX SIZE	COLORS/ FINISHES	GUIDE
624	Flat-265	24/24-ga Cold Rolled Galvanized Steel - Insulated FIP R=7.2	Flat 2-5/8" x 5/8"	26' x 30' or 31' x 20'	White/Gray/Tan/ Galvanized/Powder Coat	Min. 3/16" Structural Steel
622	Flat-265	22/24-ga Cold Rolled Galvanized Steel - Insulated FIP R=7.2	Flat 2-5/8" x 5/8"	26' x 30' or 31' x 20'	White/Gray/Tan/ Galvanized/Powder Coat	Min. 3/16" Structural Steel
620	Flat-265	20/24-ga Cold Rolled Galvanized Steel - Insulated FIP R=7.2	Flat 2-5/8" x 5/8"	26' x 30' or 31' x 20'	White/Gray/Tan/ Galvanized/Powder Coat	Min. 3/16" Structural Steel
618	Flat-265	18/24-ga Cold Rolled Galvanized Steel - Insulated FIP R=7.2	Flat 2-5/8" x 5/8"	26' x 30' or 31' x 20'	White/Gray/Tan/ Powder Coat	Min. 3/16" Structural Steel
622S/620S	Flat-265	22/24-ga & 20/24-ga Stainless Steel - Insulated FIP R=7.2	Flat 2-5/8" x 5/8"	24' x 24'	Stainless Steel #4	Min. 3/16" Structural Steel

Exclusively Distributed by:

JANUSINTL.COM

HEADQUARTERS:

Janus International Group
135 Janus International Blvd.
Temple, GA 30179
866-562-2580

marketing@janusintl.com

PLEASE VISIT OUR WEBSITE FOR ADDITIONAL INFORMATION:

- Color Chart
- Installation
- Technical Drawings
- Warranty