



800HP ROLLING GRILLE

rolling grille 800HP



High
Performance



Maximum
24' W - 12' H*



Up to 3x Faster
Operation



Quality
Guaranteed

STANDARD FEATURES

- Steel wall angles with black powder coat and aluminum guides
- Headplates 1/4" steel, black powder coated
- Photo eyes UL325 R5 compliant, NEMA rated
- Springless barrel high-cycle use, left/right handing
- DC motor soft-start/stop for longer life
- Light curtain UL325 compliant, 3' or 6' lengths
- QuickPak crating reduces install time, cost, damage
- Value delivers security, speed, durability, ventilation
- Speed up to 24" open / 12" close
- Cycle life 400k cycles, 2-year warranty
- DC motor quiet, soft-start/stop, low maintenance
- Safety photo eyes, light curtain, anti-drop protection

OPTIONS

High Cycle: Cycle life upgradeable to 600,000 cycles or three years

Traffic Light Kit: 3' IP68 LED

Scan below to see additional features and options.

The **Janus International 800HP Series High Performance Grille** delivers superior speed, durability, and security. Operating up to 24" per second open and 12" per second close, it outperforms traditional grilles with unmatched strength and reliability—ideal for parking garages, hospitals, schools, retail, and other high-cycle applications.

Scan for
more information,
technical specs, and
drawings of this door:



**Contact JANUS for size and options, some limitations may apply.*



Scan to see this door:



800HP ROLLING GRILLE



OPERATOR: 800HP Series High Performance Grille Doors feature the SecureDrive+ direct drive operator designed specifically for applications requiring high performance. Less wear and tear on the door and operator results in increased operational life.



CONTROL BOX: Plug and Play NEMA 4X wall mounted control panel with variable frequency drive.




BOTTOM BAR: Tubular aluminum extrusion with PVC bulb astragal.



CURTAIN: The 800HP Series curtains are assembled with 5/16" diameter extruded aluminum rods spaced 1-3/4" on center for maximum durability.



GUIDE ASSEMBLY: Wall angle to be 3/16" minimum thickness structural steel angles. Guides to be extruded aluminum, 3" x 1-1/2" with shoulders for curtain retention fitted with vinyl stripping both sides of curtain with removable headstops.

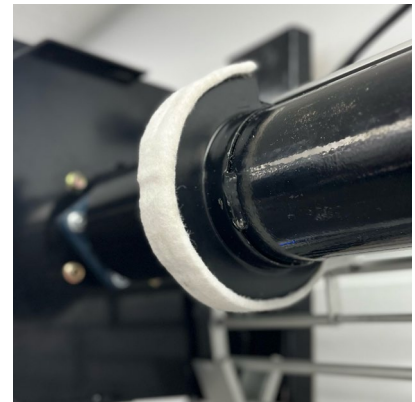

BARREL WITH RINGS: Springless Barrel with rings increase the curtain wrap diameter, allowing for smooth coiling and uncoiling of the door, while reducing maintenance costs.

MODEL	PATTERN	MATERIAL	GRILLE SIZES	MAX WIDTH	MAX HEIGHT	COLORS/FINISHES	GUIDES	SPEED
800HP	Straight	Aluminum	5/16" rods with interlocking 1" x 5/8" x 4-1/4" Aluminum Links	24'	12'	Clear Anodized	3"x 1-1/2" Aluminum	24"/Sec Open 12"/Sec Close
800HP	Brick	Aluminum	5/16" rods with interlocking 1" x 5/8" x 4-1/4" Aluminum Links	24'	12'	Clear Anodized	3"x 1-1/2" Aluminum	24"/Sec Open 12"/Sec Close

Exclusively Distributed by:

JANUSINTL.COM

HEADQUARTERS:

Janus International Group
135 Janus International Blvd.
Temple, GA 30179
866-562-2580

marketing@janusintl.com

PLEASE VISIT OUR WEBSITE FOR ADDITIONAL INFORMATION:

- Color Chart
- Installation
- Technical Drawings
- Warranty