
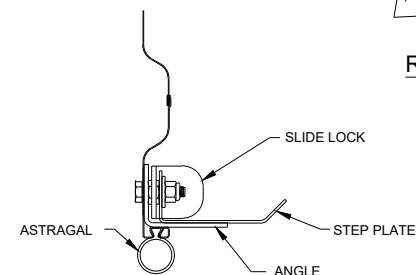


1. OPERATION TYPE MAY BE PUSH-UP, RIGHT HAND CHAIN HOIST, OR RIGHT HAND INTERNAL ELECTRIC.
2. FOR CRITICAL FITS DUE TO REDUCED AVAILABLE HEADROOM OR SIDEROOM CLEARANCES, CONSULT FACTORY.
3. CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
4. UNLESS OTHERWISE NOTED, DOORS SHALL BE PROVIDED WITH SLIDE LOCKS AT EACH END OF BOTTOM BAR, ENGAGING GUIDES IN THE LOCKED POSITION (OPTIONAL CURTAIN MOUNTED MINI LATCH)
5. ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
6. SERIES 1100I IS AN INSULATED SERIES 1100.
7. CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAINT OVER GALVANIZED GRADE 80 STEEL.
8. GUIDES, BRACKETS, BOTTOM BAR ANGLE AND HEAD STOPS ARE ZINC COATED.
9. MAXIMUM OPENING SIZE: 12'-0" X 14'-0".
10. PRODUCTS PRODUCED WITH A THIRD-PARTY EVALUATION TO ADHERE TO THE TEXAS DEPARTMENT OF INSURANCE STANDARDS WILL BE LISTED VIA. WWW.TDI.TEXAS.GOV
11. JANUS MODEL 750 IS A STATE OF FLORIDA APPROVED WINDLOAD PRODUCT. PRODUCT EVALUATIONS AND STAMPED DRAWINGS ARE ACCESSIBLE VIA. WWW.FLORIDABUILDING.ORG . FL#21450
12. RAIN LIP CLEARANCE DIMENSION OUTSIDE OF GUIDE = 4 5/8" MINIMUM.

OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
THRU 8'-0"	18"	17 ½"
OVER 8'-0" THRU 10'-0"	18 ½"	17 ¾"
OVER 10'-0" THRU 12'-0"	18 ¾"	18"
OVER 12'-0" THRU 14'-0"	19"	18 ½"

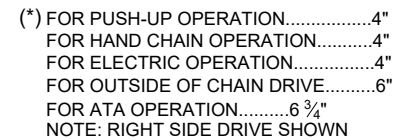

5/8" OVERALL

R 3/8" TYP

3 3/4"

59°

DETAIL A

DRAWING #: 814005-0000		L.E. 09/06/2024	
<h1>COMMERCIAL DOOR SERIES: 1100/1100I</h1>			
CUSTOMER NUMBER:		DATE:	
CUSTOMER NAME:		CONTACT:	
PROJECT NAME:			
PROJECT LOCATION:			
PLANT:		SALESPERSON:	
DRAWN BY:		DATE:	
DRAWING NUMBER:		SHT:	OF:
		JANUS INTERNATIONAL GROUP, LLC. 135 JANUS INTERNATIONAL BLVD. TEMPLE, GA 30179-4435 770-562-2850 FAX: 770-562-2264	